



All materials compliant with RoHS, REACH standards


REV.	DATE	DESCRIPTION
A0	2024.11.22	ISSUE

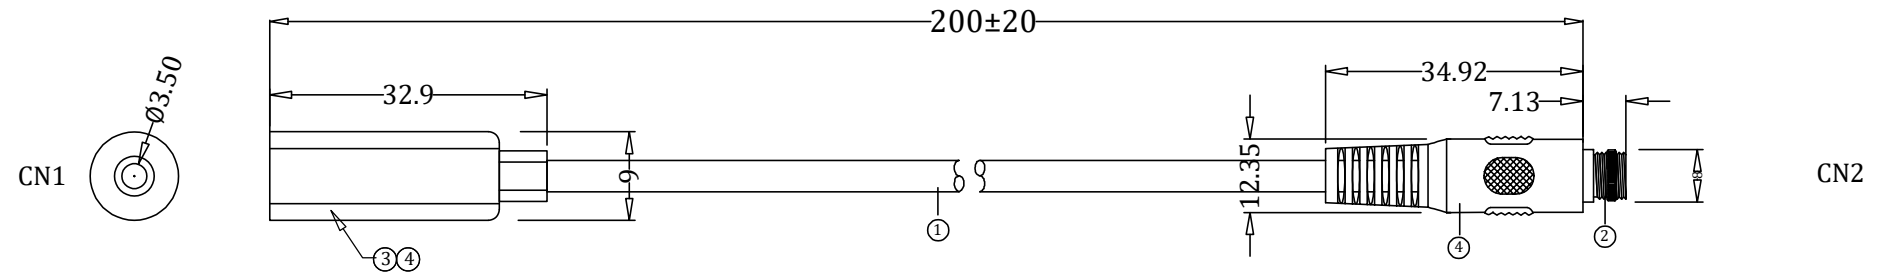

PIN OUT



SEC:A--A'

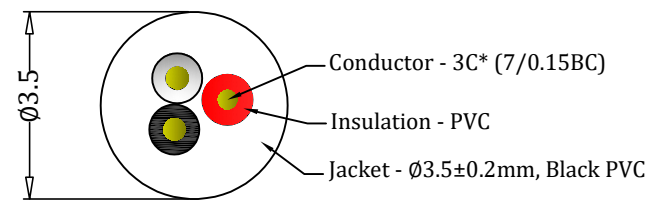

Electronic Tests:

- 1>. Open/Short/Intermittence: 100%
- 2>. Insulation Resistance: DC 300V 0.01S 5MΩ Min
- 3>.Conducor Resistance: 3Ω Max
- 4> Hi-Pot: AC 300V 0.01S 2mA

**NINGBO FARSINCE ELECTRONIC CO., LTD**  
 T: +86 574 87042335 E: sales@farsince.com W: www.farsince.com

THIRD ANGLE PROJECTION	Customer	
	Model No.	
-TOLERANCES- LENGTH: X±0.3 .X±0.2 .XX±0.1 ANGLE: X°±2° .X°±1° .XX°±0.5°	Drawing No.	FSP0001
	Product Description	3.5ST/F TO 3.5ST/F with Nut Cable
	Units:mm	Approved: Franck
Page: 1 of 1	Check: Sam	
	Design: Bill	

NO.	NAME	SPECIFICATIONS	Q'TY	UNIT
4	Outer Mold	45P PVC, Black	13	G
3	Connector	3.5mm Female, PIN and Shell Nickel Plated	1	PCS
2	Connector	3.5mm Female, PIN and Shell Nickel Plated, with Nut	1	PCS
1	Cable	26AWG (7/0.15BC)*3C Black PVC Jacket, OD:3.5±0.2mm	0.20	M