



All materials compliant with RoHS, REACH standards


REV.	DATE	DESCRIPTION
A0	2024.11.22	ISSUE

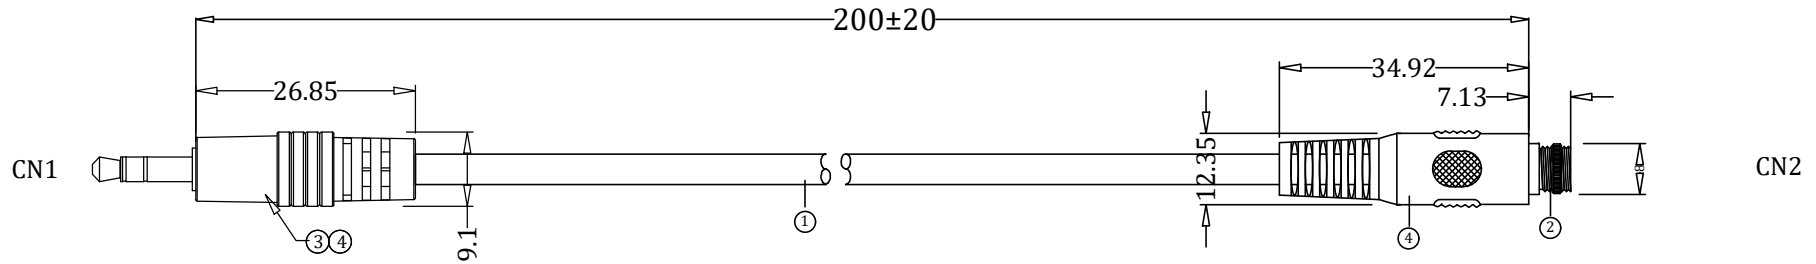

PIN OUT



SEC:A--A'

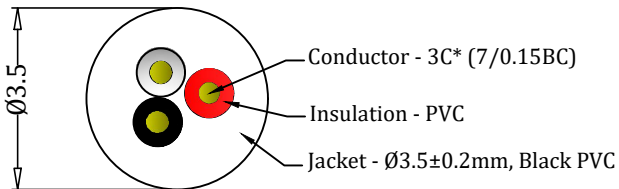

Electronic Tests:

- 1>. Open/Short/Intermittence: 100%
- 2>. Insulation Resistance: DC 300V 0.01S 5MΩ Min
- 3>.Conducor Resistance: 3Ω Max
- 4> Hi-Pot: AC 300V 0.01S 2mA

NINGBO FARSINCE ELECTRONIC CO., LTD
 T: +86 574 87042335 E: sales@farsince.com W: www.farsince.com



Customer	
Model No.	
Drawing No.	FSP0002
Product Description	3.5ST/M TO 3.5ST/F with Nut Cable
Units:mm	Approved: Franck
	Check: Sam
Page: 1 of 1	Design: Bill

NO.	NAME	SPECIFICATIONS	Q'TY	UNIT
4	Outer Mold	45P PVC, Black	13	G
3	Connector	3.5mm Male, PIN and Shell Nickel Plated	1	PCS
2	Connector	3.5mm Female, PIN and Shell Nickel Plated, with Nut	1	PCS
1	Cable	26AWG (7/0.15BC)*3C Black PVC Jacket, OD:3.5±0.2mm	0.2	M